RFAL TECHNOLOGY

E S D

CASTOR WHEELS

NO. Model	Wheel Material	Wheel Dia (mm)	Tread Width (mm)	Load Height (mm)	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)	Load Capacity (kg)
801ZN-010-500-233-0G	ESD/ AS TPR	50(2")	18	72	50×50	35×35	6.5	20
801ZN-010-075-233-0G	ESD/ AS TPR	75(3")	25	101	65×65	45×45	6.5	40
801ZN-010-100-233-0G	ESD/ AS TPR	100(4")	25	124	65×65	45×45	6.5	60

NO. Model	Wheel Material	Wheel Dia (mm)	Tread Width (mm)	Load Height (mm)	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)	Load Capacity (kg)
801ZN-020-050-233-0G	ESD/ AS TPR	50(2")	18	72	50×50	35×35	6.5	20
801ZN-020-075-233-0G	ESD/ AS TPR	75(3")	25	101	65×65	45×45	6.5	40
801ZN-020-100-233-0G	ESD/ AS TPR	100(4")	25	124	65×65	45×45	6.5	60

NO. Model	Wheel Material	Wheel Dia (mm)	Tread Width (mm)	Load Height (mm)	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)	Load Capacity (kg)
801ZN-025-050-233-0G	ESD/ AS TPR	50(2")	18	72	50×50	35×35	6.5	20
801ZN-025-075-233-0G	ESD/ AS TPR	75(3")	25	101	65×65	45×45	6.5	40
801ZN-025-100-233-0G	ESD/ AS TPR	100(4")	25	124	65×65	45×45	6.5	60

Description

Material: Thermo plastic rubber
Swivel Section: Precision steel ball with double track design
Installation: Fix, Swivel and brake

Threads

Color: Grey
Hardness: 75A
Wheel Core: PP
Wheel Tread: TPR
Conductive: 10^3 - 10^5
Anti-Static: 10^8 - 10^{10}

233 Series

Top Plate (mm)

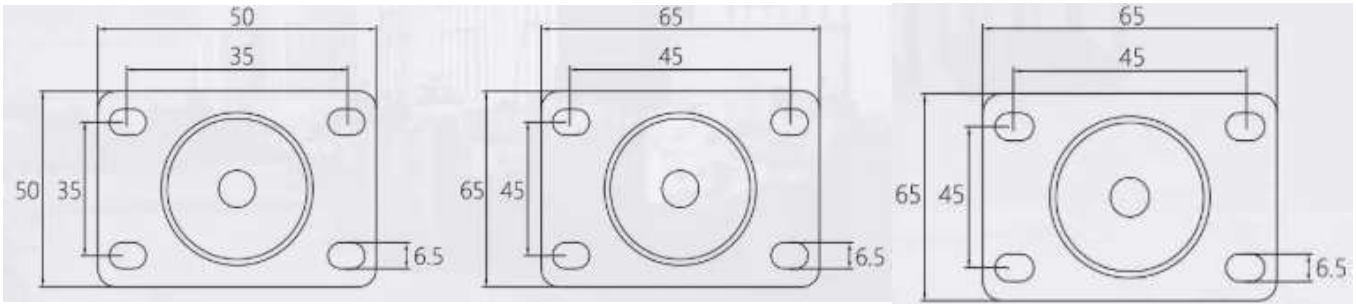

2" wheel 3" wheel 4" wheel

NO. Model	Wheel Material	Wheel Dia (mm)	Tread Width (mm)	Load Height (mm)	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)	Load Capacity (kg)
801ZN-010-063-333-2G	ESD/ AS TPR	63(2.5")	32	92	96×66	75×45	8.5	50
801ZN-010-075-333-2G	ESD/ AS TPR	75(3")	32	105	96×66	75×45	8.5	60
801ZN-010-100-333-2G	ESD/ AS TPR	100(4")	32	130	96×66	75×45	8.5	80
801ZN-010-125-333-2G	ESD/ AS TPR	125(5")	32	158	96×66	75×45	8.5	90

NO. Model	Wheel Material	Wheel Dia (mm)	Tread Width (mm)	Load Height (mm)	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)	Load Capacity (kg)
801ZN-020-063-333-2G	ESD/ AS TPR	63(2.5")	32	92	96×66	75×45	8.5	50
801ZN-020-075-333-2G	ESD/ AS TPR	75(3")	32	105	96×66	75×45	8.5	60
801ZN-020-100-333-2G	ESD/ AS TPR	100(4")	32	130	96×66	75×45	8.5	80
801ZN-020-125-333-2G	ESD/ AS TPR	125(5")	32	158	96×66	75×45	8.5	90

NO. Model	Wheel Material	Wheel Dia (mm)	Tread Width (mm)	Load Height (mm)	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)	Load Capacity (kg)
801ZN-022-063-333-2G	ESD/ AS TPR	63(2.5")	32	92	96×66	75×45	8.5	50
801ZN-022-075-333-2G	ESD/ AS TPR	75(3")	32	105	96×66	75×45	8.5	60
801ZN-022-100-333-2G	ESD/ AS TPR	100(4")	32	130	96×66	75×45	8.5	80
801ZN-022-125-333-2G	ESD/ AS TPR	125(5")	32	158	96×66	75×45	8.5	90

Description

Material: Thermo plastic rubber - double ball bearing
Swivel Section: Precision steel ball with double track design
Installation: Fix, Swivel and brake

Threads

Color: Grey
Hardness: 75A
Wheel Core: PP
Wheel Tread: TPR
Conductive: 10^3 - 10^5 (333-2G)
Anti-Static: 10^8 - 10^{10} (334-2G)

333 Series

Top Plate (mm)

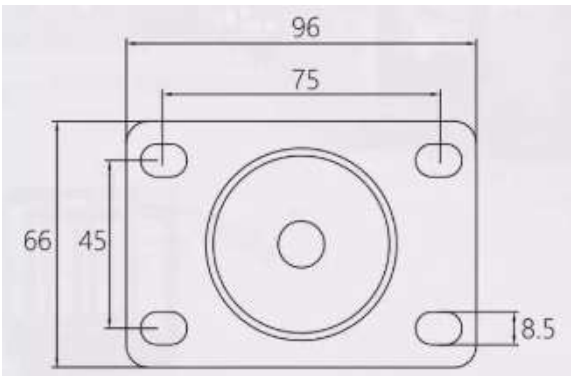

NO. Model	Wheel Material	Wheel Dia (mm)	Tread Width (mm)	Load Height (mm)	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)	Load Capacity (kg)
801ZN-010-100-834-2G	ESD/ AS TPR	100(4")	45	143	115×100	85×70	11	140
801ZN-010-125-834-2G	ESD/ AS TPR	125(5")	45	164	115×100	85×70	11	180
801ZN-010-150-834-2G	ESD/ AS TPR	150(6")	45	190	115×100	85×70	11	200
801ZN-010-200-834-2G	ESD/ AS TPR	200(8")	45	240	115×100	85×70	11	210

NO. Model	Wheel Material	Wheel Dia (mm)	Tread Width (mm)	Load Height (mm)	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)	Load Capacity (kg)
801ZN-020-100-834-2G	ESD/ AS TPR	100(4")	45	143	115×100	85×70	11	140
801ZN-020-125-834-2G	ESD/ AS TPR	125(5")	45	164	115×100	85×70	11	180
801ZN-020-150-834-2G	ESD/ AS TPR	150(6")	45	190	115×100	85×70	11	200
801ZN-020-200-834-2G	ESD/ AS TPR	200(8")	45	240	115×100	85×70	11	210

NO. Model	Wheel Material	Wheel Dia (mm)	Tread Width (mm)	Load Height (mm)	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)	Load Capacity (kg)
801ZN-026-100-834-2G	ESD/ AS TPR	100(4")	45	143	115×100	85×70	11	140
801ZN-026-125-834-2G	ESD/ AS TPR	125(5")	45	164	115×100	85×70	11	180
801ZN-026-150-834-2G	ESD/ AS TPR	150(6")	45	190	115×100	85×70	11	200
801ZN-026-200-834-2G	ESD/ AS TPR	200(8")	45	240	115×100	85×70	11	210

Description

Material: Thermo plastic rubber - double ball bearing
Swivel Section: Precision steel ball with double track design
Installation: Fix, Swivel and brake

Threads

Color: Grey
Hardness: 75A
Wheel Core: PP
Wheel Tread: TPR
Conductive: 10^3 - 10^5
Anti-Static: 10^8 - 10^{10}

834 Series

Top Plate (mm)

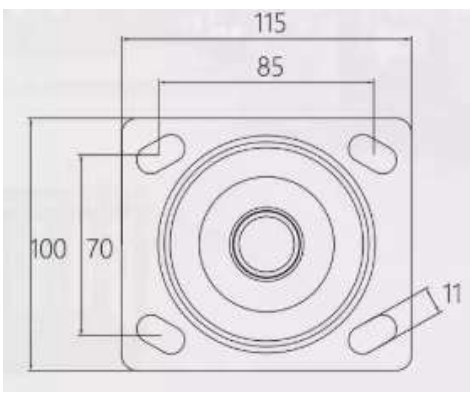

GETTING YOUR CASTOR WHEELS HAS NEVER BEEN EASIER!

Call Us for a Quick Quote

Discuss and Customize

Fast and Reliable Delivery

Kindly visit our showroom at:
First Floor, Bearing No.8/29, Durga Colony, First Street, Kolathur, Chennai-600099

FROM LIGHT-DUTY TO HEAVY-DUTY

MEDICAL TO INDUSTRIAL

WE HAVE THE PERFECT WHEELS FOR EVERY PRODUCT, CATEGORY APPLIANCE!

About Us

At RFAL Technology Pvt Ltd, we are proud to be the exclusive importer and distributor of premium castor wheels in India. Serving diverse industries, including medical, industrial, and heavy-duty applications, we ensure top-quality products with unmatched reliability. With ready stock, competitive pricing, and customization options, we are committed to delivering excellence and mobility solutions tailored to your needs.

Contact Us

Mobile
+91 97917 63278

E-Mail
info@rfaltech.in

Website
www.rfaltech.in